



2013 REGINA 43

FÖRMEDLING • SE-REX43044F213

REGISTRERAD I TYSKLAND VISNING LYSEKIL, SWEDEN

YANMAR 4JH4 (75HP) - 148H TOPPFART, CA LÄNGD 13.26 M X BREDD 3.98 M 2 KABINER • 2 WC

SOLD

Princess Yachts West Sweden +46 (0) 304 390 90 princessyachts.se Princess Yachts Norway +47 66 76 08 70 princessyachts.no Princess Yachts Denmark +45 70 26 84 84 princessyachts.dk



FRAMDRIVNING

Motorer	Yanmar 4JH4
Motor	75 HP
Hours	ca 148 H
Тур	Inboard
Drivtyp	Sail
Bränsle	diesel

DIMENSIONER


Längd	13.26 m
Bredd	3.98 m
Djup, ca	1.8 m
Weight, ca	12500 kg
Bränsle	360 L
Vatten	750 L
Septik	2x 75 L

ÖVRIGT

Tillverkare	Regina af Vindö
Båtkategori	Sail
Material	Fiberglass
Kabiner	2
WC	2

OPTIONS INCLUDED Raymarine plotter/radar C90W in saloon Raymarine plotter/radar C90W on binnacle VHF 240E with speaker **Biminitop** Leather sofa in saloon Main sail furling system controlled from cockpit 2x ST 52 Andersen electrical winches (used for Genua) Upgrade with 1x ST46 Andersen Variable electrical winch port side (used for mainsail furling) Double forstays: 1x Seldén Furlex Upgrade to self tacking system, inner forstay, jib 1x Spinlock clutch for reefing Bow sprit for double forestay Furlex with a roller for CQR anchor and a fixed roller for anchoring. telescopic ladder in stainless steel 3 blade folding propeller Flex o Fold Shower on swimming platform (hot and cold) Sprayhood extension/cockpit tent (alu. frame) Upgrade forward heads with shower Upgrade to electric toilet (aft) Bow thruster SE/100/185T (8,4 hp) Mastervolt Easy view and Master shunt 500, Mastervolt 230V & 12V energy monitoring Upgrade with extra domestic battery AGM 100 RR Combo aerial Antigua VHF/FM/TV Radio/CD player, 2 speakers in saloon with 1x AUX for external inputs (3,5 mm plug) Coppercoat antifouling

OFFICIAL DISTRIBUTOR WEST SWEDEN / NORWAY / DENMARK STANDARD EQUIPMENT Hull and deck Hand laid laminate sandwich construction Isophalic polyester AMT technology Core material, end grain balsa Hull colour in White finish Deck colour in White finish Waterline and trim lines laid in to the gelcoat Rig and sails Seldén rig; Furling mast Keel stepped mast with fractional 19/20 rig with two pairs of swept spreaders Standing rigging of stainless steel wire Manual controlled backstay adjuster Seldén rodkick Stainless steel chain plates, bolted to transverse bulkhead, laminated to both sides of hull Internal main and genoa halyards of stainless steel wire, spliced to halyard line. Andersen stainless winch and jammers on mast for the halyards. Headsail on Seldén Furlex system, furling line lead to the cockpit through blocks and a Spinlock clutch for reefing. Mast equipment includes, deck light, steaming light, tri-colour and anchor light, windex and flag halyards Furling Vertech Mainsail/Vertical Battens 47 m Furling Genoa 51 m Winches Andersen stainless steel, self tailing 2x ST 52 Genoa winches 2x ST 46 Main winches 1x ST 40 Halvard winch on the mast 2x Andersen winch handles Sails and Engine Lundh sails made in High Quality Pentex Cruising Laminate Mainsail Vertech in Pentex with vertical battens and UV protection Genoa 140% Pentex Cruising Laminate and UV protection One mechanical engine control at binnacle Mooring equipment 4 x Stainless steel mooring cleats, through bolted 2 x Stainless steel spring cleats, through bolted 6 x Stainless steel protection strips at cleats 4 x mooring lines 6 x fenders with Regina logo and burgundy top. 2 x rubbing strakes on hull in brass. Anchor System Bow roller with Lofrance 1000W windlass with removable hand control in chain locker and 20 kg CQR anchor Cockpit control for windlass at binnacle 40m of 8mm chain + swivel between anchor and chain

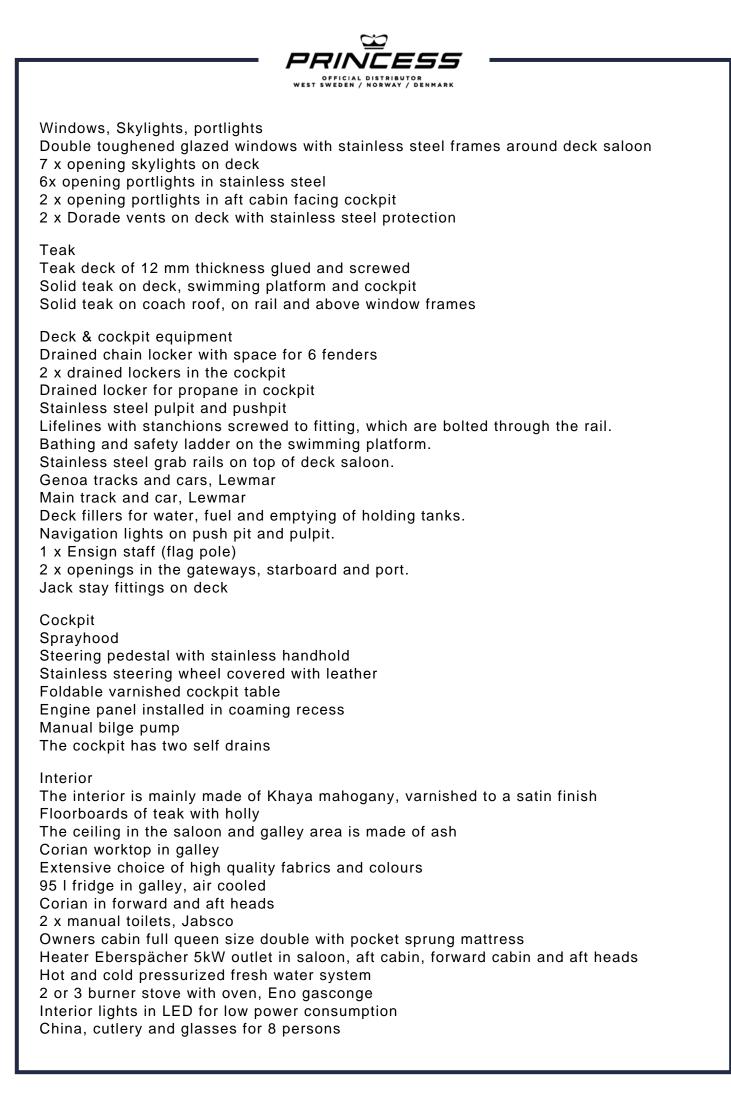

3 fire extinguishers

Electrical system

At the navigation station, there is a switch panel with 12V circuit breakers, 2x water tank monitors, 1x fuel monitor and 1x dc monitor

OFFICIAL DISTRIBUTOR WEST SWEDEN / NORWAY / DENMARK

The domestic system voltage is 12V, including 3 AGM batteries 12V/100Ah One separate AGM battery for engine start 12V/75Ah.

The 12V Electric Power is supplied by the engines alternator or the Mastervolt battery charger.

The 230V shore power system includes 20m cable, Mastervolt Mass GI Galvanic Isolator, Mastervolt Masterswitch panel including RCD breaker (earth fault indicator), separate 10 A fuses for starboard and portside of the 230V system and 4 sockets (230V) in total All main wiring is in tined copper.

There are 3 separate 12V main switches, one for domestic, one for engine start and one for power equipment.

Mastervolt Battery Charger and Inverter, Mass Combi 12V/2000W-100A

1 x zink anode on the hull 1,5kg

1 x ground plate

1 x Electric bilge pump

1 x water boiler 40L Isotherm, heated by 230V and engine cooling fluid

Navigation Raymarine ST70 3x displays (Depth, Wind and Speed) Auto pilot SPX30 Gyro ST70 on binnacle and S100 remote at nav. station (inside)

Informationen om denna båt är given i god tro och antages vara korrekt, men kan inte garanteras. En köpare, eller dennes besiktningsman, bör undersöka sådana detaljer och skick som köparen önskar validerade. Vi reserverar oss för ändringar eller att båten upphör vara till salu.



Princess Yachts West Sweden +46 (0) 304 390 90 princessyachts.se Princess Yachts Norway +47 66 76 08 70 princessyachts.no Princess Yachts Denmark +45 70 26 84 84 princessyachts.dk